








# PRO Built Beam Install Tutorial

Our goal is to make the install a breeze. Please read the entire guide before unpacking the beam. Something NEW for 2020, is the use of Smart Phone integrations by scanning QR codes with your phone's camera or a QR code app. Any time you see a  that tool is available on our [Amazon tool page](#). If a Video tutorial has been created for this product, you will find it [here](#). If you have a tech question, you can [text us here](#).

1. Before the installation takes place, measure  the distance from the ground to your upper fender arch. Write those numbers down on a piece of paper for reference later.
2. Loosen the lug nuts 1/4 turn before jacking the vehicle up.
3. Jack  up the front of the vehicle and place stands  underneath the chassis.
4. Remove the wheels and place under the chassis as a fail safe.
5. Lift the front hood and remove the 4 gas tank bolts.
6. If your vehicle is equipped with a vent line, you will need to remove that prior to removing your tank.
7. Lift the tank high enough to pinch  the line to remove the tank.
8. Remove the steering column shaft from the steering box, including the horn wire.
9. You will have two bolts that fasten the body to the front beam. Early models will be outside the gas tank area, late models will be inside the gas tank area.
10. The speedometer cable must be removed from the left side spindle. To do this, remove the cir clip from the dust cap. Then pull the cable from the back of the spindle to remove it from the spindle.
11. If you purchased BAD Series Brakes at the same time as your PRObuilt Beam, skip these steps (-)
12. To avoid from bleeding  your brakes again, you will need to remove the brakes with out removing the brake lines and bleeders. Remove the dust caps, spindle nut or nuts and remove the drums. Once removed, remove the backing plates and set to the side.
13. To make lowering the complete beam as easy as possible, you must remove the larger tie rod assembly. Several different ways of doing this. Our favorite at this time is to loosen the nuts on the tie rod nut and utilize an air hammer  to force the tie rod end shaft through the spindle with out damaging the threads or paint finish. Once loose, remove the nuts and the rod and set to the side.

## Tools you need









## Video Tutorials



## Tech Support



14. Spray the front beam bolts with WD40  or a rust penetrant to make removing them as easy as possible. While you let these soak, grab a beer or coffee and take a break.
15. Break loose the bolts and place a jack  under the front beam assembly. Grab a buddy or the wife to help you with this next part. Once all the bolts are removed, balance the beam on the jack and have your side kick lower the beam.
16. Relocate the old beam to the garage while you prep your new PRObuilt Beam.
17. If you are using Airkewld's PRObuilt installation kit with stainless steel beam bolts, apply anti seize on them and place near your vehicle.
18. It is always recommend chasing  the threads with old or new hardware to ensure proper engagement. These bolts are threaded 12mm x 1.50.
19. Unbox the new PRO Built Beam and unwrap the plastic wrap.
20. It's alright to smile, we had a hard time shipping this to you, it was that beautiful.
21. Before unbolting the beam from the pallet, remove the long tie rod assembly off of the beam. Remember the steps above for proper removal. It should be loose and marked with a blue label.
22. To keep the beam as nice as possible, place the entire area under your pride and joy with blankets, moving pads , card board, what ever you can find to allow you to slide the beam into place and avoid scratching your PRO Built Beam. Wrap the jack pad with a towel as well or you can use this jack pad . Place plastic grocery bags over the sides of the shock towers to avoid scuffs on the beam and the paint on your body.
23. If your purchased the optional installation kit, you should have received the lower body mount rubbers. Apply a little grease  to them and place them on the body bungs on your front beam.
24. With the help of your buddy or wife, lift the beam onto the jack and balance as they jack up the beam into place.
25. It might take a little while to get it into place, be patient, it will be worth it. Once in place, tighten the bolts. Do not over tighten, I can tell you have some guns, go easy on her.
26. If you purchased the optional installation kit, you should have received the upper body mount rubbers. Lube them up and place them in the factory locations.
27. Re-install the body to beam bolts and tighten.
28. Re-install the new tie rod assembly and tighten.
29. Your steering box should be centered from the get go. But your steering might not be. So we recommend installing the coupler and centering the steering wheel. To do this, we recommend turning the steering wheel from left to right and count the revolutions. Then rotate have the amount of revolutions and center your steering wheel on the shaft.
30. If you are using your stock brakes, reinstall your backing plates, drums and dust caps to factory specs.
31. To install the speedo cable, apply some grease on the exterior cable and push through the spindle and install the factory cir clip.
32. Stage 1 Applications Only (Adjustable/Non-Air Ride) - If you would like to dial in the ride height, we recommend lowering the vehicle onto the ground and preload the


suspension. If you are happy with the height, proceed to the next step. If you would like to raise it up, you will need to loosen all the jam nuts and screw in the adjustment bolts (Bolts pointing towards the ground), upwards to lift the vehicle. Ball joint models, you will need to loosen the center grub screws during this adjustment process. To lower it, you will loosen the adjustment bolts in equal increments. Lower and preload and adjust as needed. \*If you purchased the adjustable shocks, you will be able to fine tune the ride quality of the vehicle. We set them in the softest range but you can tighten them to get the desired ride quality.



33. Stage 2 Applications Only (Air Ride) - Run the air lines inside the trunk area in a clean manor to make connections easily. If you also purchased the air management kit, follow those installation instructions.
34. NOTE on both Stage 1 & 2 Applications - If you made adjustments at all in the above two steps, you will need to fine tune the alignment. We recommend taking the vehicle to a digital alignment rack for a FOUR WHEEL alignment, not a TWO WHEEL alignment, to make sure the tires last as long as possible and you get the finest user experience.
35. Install your fuel line, gas tank and vent lines to factory specs.
36. Close the hood, install the tires and lower the vehicle onto the ground. Compare the measurements you first took to ensure the measurements are similar left to right.
37. If you haven't yet, you should be grinning and your friends should be drooling.

Trouble Shooting - To date, we have built about 1000 PRObuilt Beams. Through those sales, we have trouble shot just about everything.

- I have some play in my steering box, how do I fix this? Check all your joints in the steering shaft,

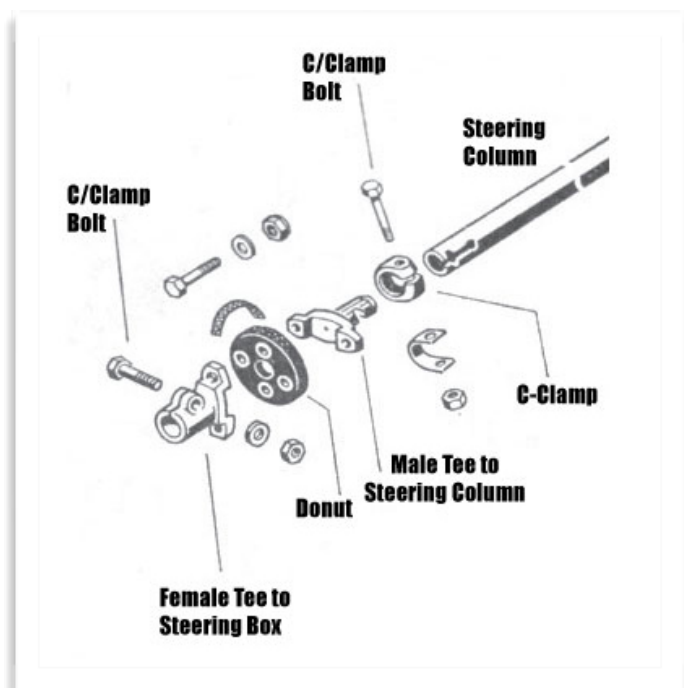

there are 6 possibilities where play can be had. With help from a friend, have your friend rock the steering wheel left to right to engage any play in the steering box. Inspect all parts of the steering system. Column parts, tie rod ends, spindles, steering box to beam, pitman arm etc, determine that all parts are properly installed and to spec. 95% of the play after installation are in the steering column connections.

- The two tee's and c-clamp connections are almost never tightened enough for the serrations on the male tee and steering box to bite into the female tee and steering column.
- If you still have play, there is an adjustment bolt on the top of the box. Before you loosen the jam nut, call or text us. You should never have to adjust this until the steering box is broken in.
- If everything checks out above, incrementally tighten the screw while the steering wheels is being rocked left to right until all the play is gone. Then tighten the nut.
- My ride is firmer then my original beam was. How can I make it softer? We offer two different shock applications. Oil and adjustable. If you are saying that the ride is firmer with the oil shocks, that is the smoothest your going to get. Pump the suspension full of grease through the four grease zerks and allow the vehicle to break in.
- If you have adjustable shocks, turn the adjusters right to left and test on each click to ensure the feel you are after.
- On my Stage 1 Beam, my adjusters are really close to the ground and I know I will drag them off, how can we solve this? Once you have fine tuned your ride height, we recommend the measure the amount of thread showing on the bottom of the adjuster bracket. Take a cut off wheel and trim that amount off the end that touches the slider, not the Allen side, then re-install. This should make the bolt flush with the jam nut at the same right height.
- My car is slammed and from the looks of it, I only have about 2" of shock shaft showing, did I get the wrong size shocks on my PRO Built Beam? No. Your vehicle will move up 1.5" and 1.5" down in normal travel with bumps and pot holes.

## Maintenance

- Every time you change your oil, grease all your zerks.
- Check your bolts from time to time. It's better to check then assume.
- Check your alignment ever 5000 miles.
- Check your lugs often.

Your Old Beam can be turned into Cash/Venmo/Paypal funds!

Included in this package is a pre-paid FedEx shipping label stapled to a document. On this document is a list of parts we need desperately, and with your help, we can service many other enthusiasts. Refer to that document for more details.

The PRO's are always updating our install articles with tips, tools and videos that make the installs easier for all parties. If you have a tip or suggestions, please text or use What's App 1-623-518-3537 and let us know, we appreciate it.